


# **Taralay Impression**

A unique, stunning and eco-friendly collection, designed just for you





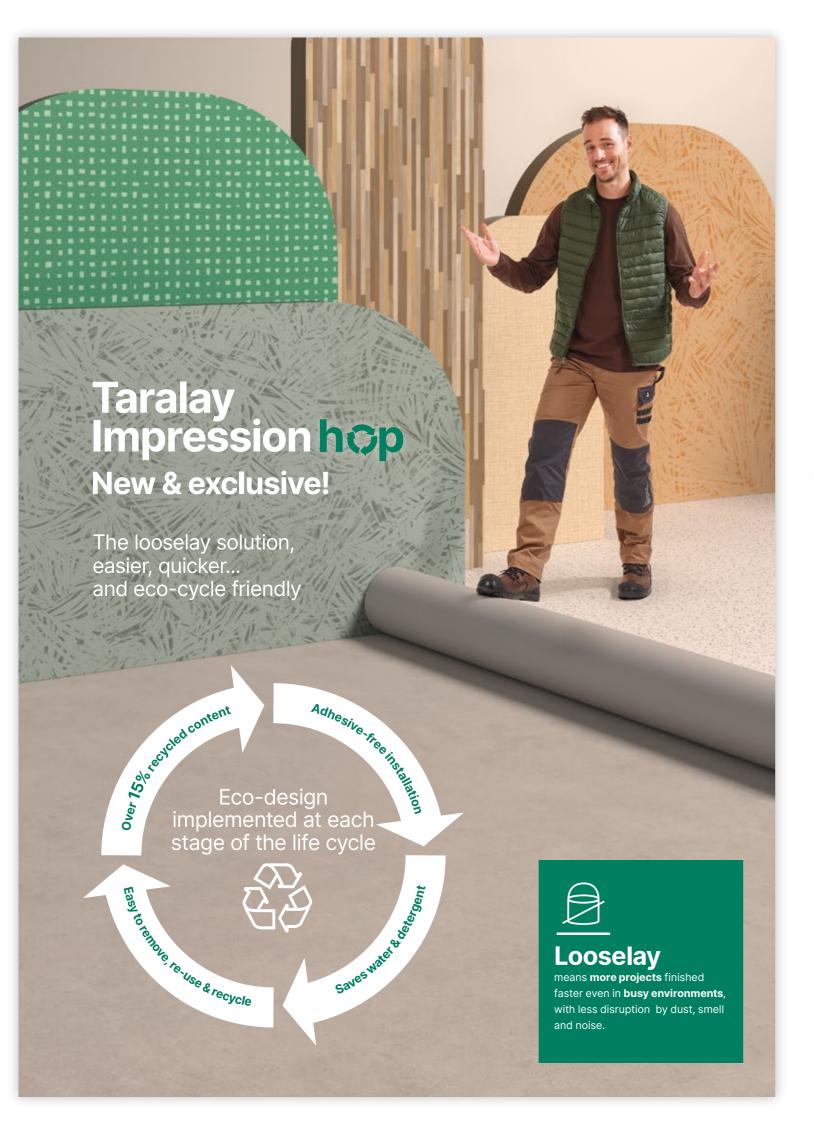



All colours available in ACOUSTIC 19dB & COMPACT 8dB




Taralay Impression hop colours available in stock

Others colours on order minimum 700 sqm

### **SAMPLES**



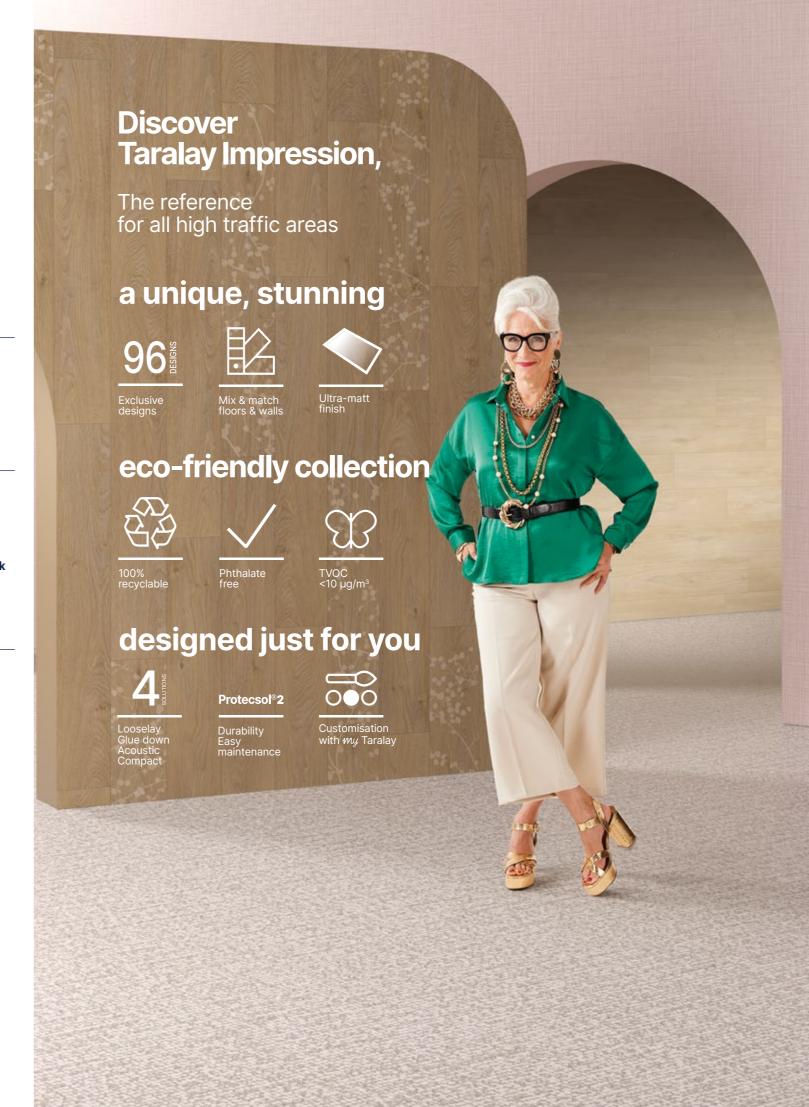





# **Taralay Impression...**

the original & eco-designed range, created for you

### For multiple high traffic uses













Healthcare

Retiremer

ent

Education

Offices & governme buildings

Hospitality businesses

Shops

1 collection 4 solutions

Compact Version

Easy wheeling
& indentationresistant

划

Acoustic Version
High-performance

G in

Glue-down installation

Taralay Impression

19 dl

Taralay Impression



Looselay



Taralay Impression

hop

19 dB

Taralay Impression

hop

Acoustic

Taralay Impression hop:

The easy solution for new-builds or renovation projects

... the answer to all your needs

# A collection that serves its users

### PROTECSOL® 2, THE STAIN GUARD


- Reduces cleaning time & saves money
- Uses less water and fewer cleaning products (detergent etc.)
- Resistant to chemicals




Its water-repellent effect prevents products that stain from penetrating.



### Stain test




### Results after cleaning

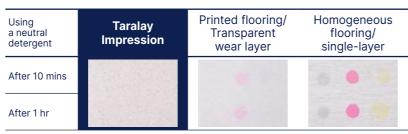

Full stain resistance table available on request

### REDUCED PUSH FORCE REQUIRED FOR WHEELING AROUND HEAVY LOADS

### Comparison of Taralay Impression vs competitors\*

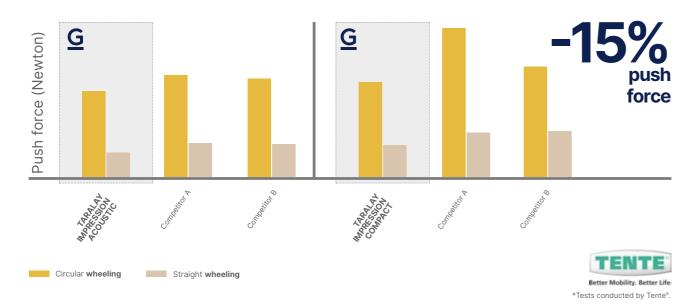


# 2 technical solutions

### Taralay Impression – Glue-down installation

### Enhanced durability to withstand heavy traffic usage

Over 20 million m<sup>2</sup> of flooring have been installed since the 1st generation of Taralay Impression. Brand new designs and colours with all the usual long-standing benefits: sustainable, easy to clean and available in a wide range of designs.



- 1 Protecsol<sup>2</sup> extra-matt surface treatment
- 2 Transparent wear layer
- 3 Design
- 4 Fibreglass
- **5** Compact interlayer
- 6 High density foam (acoustic version)

Available in a compact 8 dB or an acoustic 19 dB version


### Taralay Impression hop - Looselay



### EXCLUSIVE PRODUCT CONSTRUCTION, ESPECIALLY DEVELOPED FOR LOOSELAY INSTALLATION!

#### A stable and expansion-resistant looselay flooring

The double fibreglass + glass laid scrim reinforcement ensures excellent product maintenance. The looselay layer that is made of **recycled materials** combined with a **technical underlay** improves the product's adhesion to the floor.



= looselay

- Protecsol<sup>2</sup> extra-matt surface treatment Transparent wear layer
- 2 Design
- 3 Fibreglass
- Compact interlayer
- Glass fiber grid
- Calendered layer with recycled content
- 6 Technical underlay
- High density foam (acoustic version)
- 8 hop holding tape
- 9

Available in a compact 8 dB or an acoustic 19 dB version

# Eco-design valued at each stage of the life cycle

# Taralay Impression

### **GERFLOR IS COMMITTED**

to communicating transparently about the carbon impact of its products and focusing on eco-design, including the use of sustainable raw materials, the sustainability of its products and circular economy



# The 4 stages of the life cycle



+ 15%


Recycled content



Phthalate-free\*



**REACH** compliant

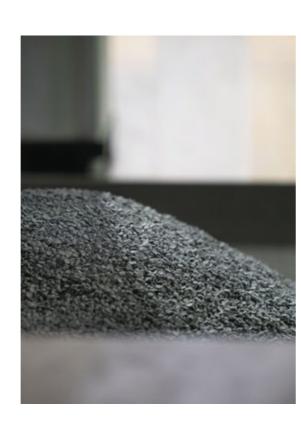

### 2 - Installation made easy in busy environments



Place the HOP holding tape where the rolls join Code: 059E/Packaging: 50 ml/box



Reinforced holding tape:

- Durable
- Easy to position
- No transfer to surface underneath



Unroll



Adhesive free: less disruption (smell, noise, dust) and fewer risks of quality



Ready to walk on straight away



Can be walked on immediately



In a renovation project **the preparation time is reduced** or unnecessary

# Eco-design valued at each stage of the life cycle





Protecsol®2

Protecsol<sup>2</sup>: stain resistant water-repellent surface saves water and detergent



Withstands wheeling heavy loads (straight or circular) up to 500 kg



Excellent resistance to indentation – 0.03 mm (compact)/ 0.08 mm (acoustic)



Excellent stability, even during temperature changes: expansion < 0.03%



Improved resistance to moisture



TVOC < 10 micrograms/m<sup>3</sup>



# ← A second life made easier

-50%

Removal time reduced by 50% in renovations, without damaging the surface underneath



Uninstall and reuse:

- Flooring can be uninstalled without damaging either the product or the surface underneath
- Flooring can be re-used for another building



Easy to recycle

- Qualifies for the **Second Life Programme**.
- Flooring is incorporated back into our production lines




A unique partnership with Paprec, recycling programmes that are certified by Eucertplast





Accelerating recycling is essential for building a more circular economy. Preserving resources and reducing the carbon footprint of our business are our commitments for Sustainable Development.



# **Taralay Impression**

the original & eco-designed range, created for you

96 wood, mineral, textile effects and graphics that can be coordinated with and match our Taralay Premium, Tarastep, wall solutions, etc.



Taralay Impression Taralay Premium

Taralay Impression



Taralay Impression Taralay Impression











### **Design concepts...**

Black & White Chic and retro

**Happy** Fun and

Biophilia Inspired by nature












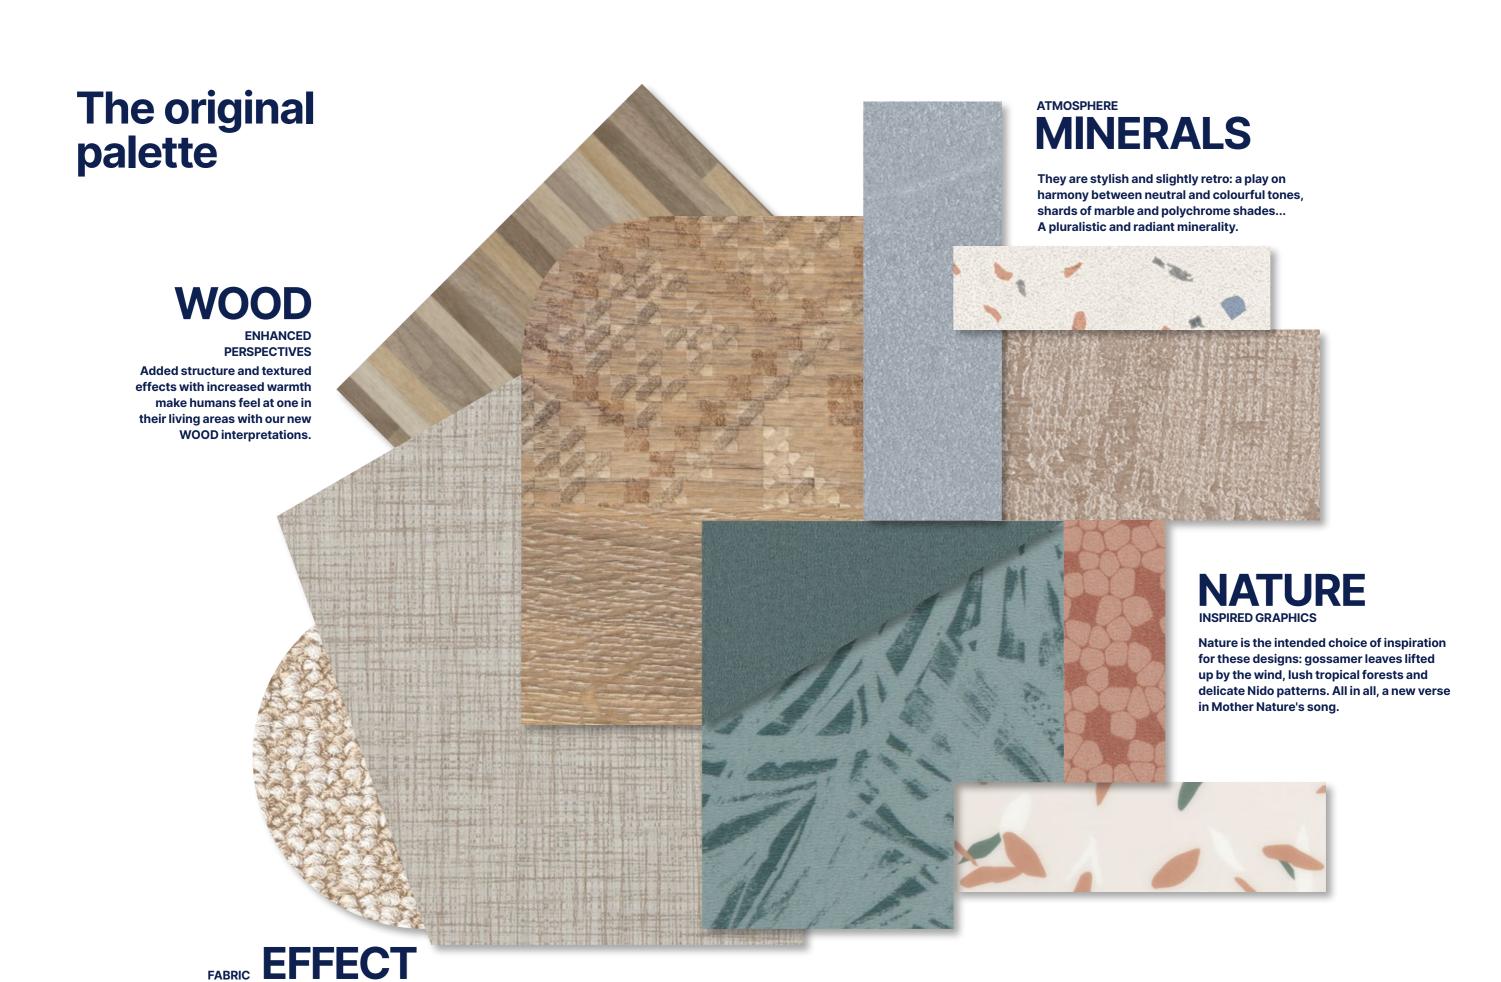

The warmth and comfort of a design inspired by woven natural fibres in unassuming colours is a perfect match for soft and subtle vintage environments.

# Taralay Impression, woods with character



Raintree Grey 1076 Scale: 15%



Raintree Natural 1077 Scale: 15%







2 cm Raintree Natural 1077





Wood Fusion Nature 1104



Scale: 20%



Scale: 20%










# Taralay Impression, timeless woods

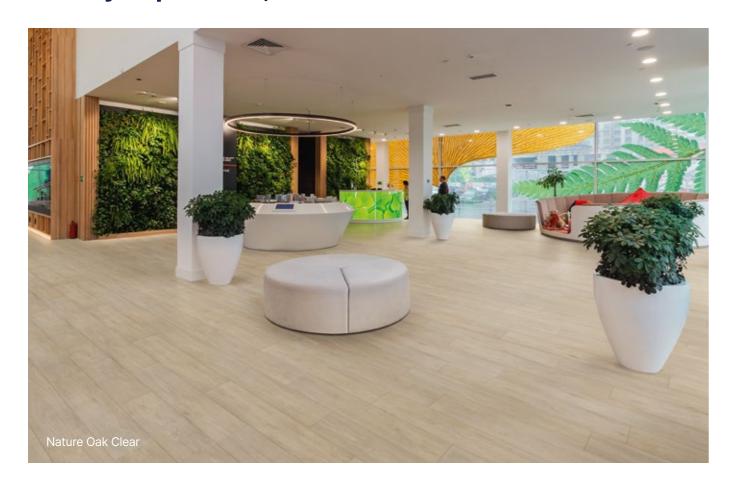







\*Available in Taralay Impression hop

# Taralay Impression, timeless woods







Infinity Aube 0720

No strip
Continuous design
Sycamore Vanilla 0727
No strip
Continuous design
No strip









Charme Kraft 1093



Habana 3D Blossom 1100 Scale: 20%







# Taralay Impression, stones & decorative concrete
























Cemento Firenze 1025 Cemento Brescia 0543

## Taralay Impression, soft textiles & uni




# **Black & White concept...**

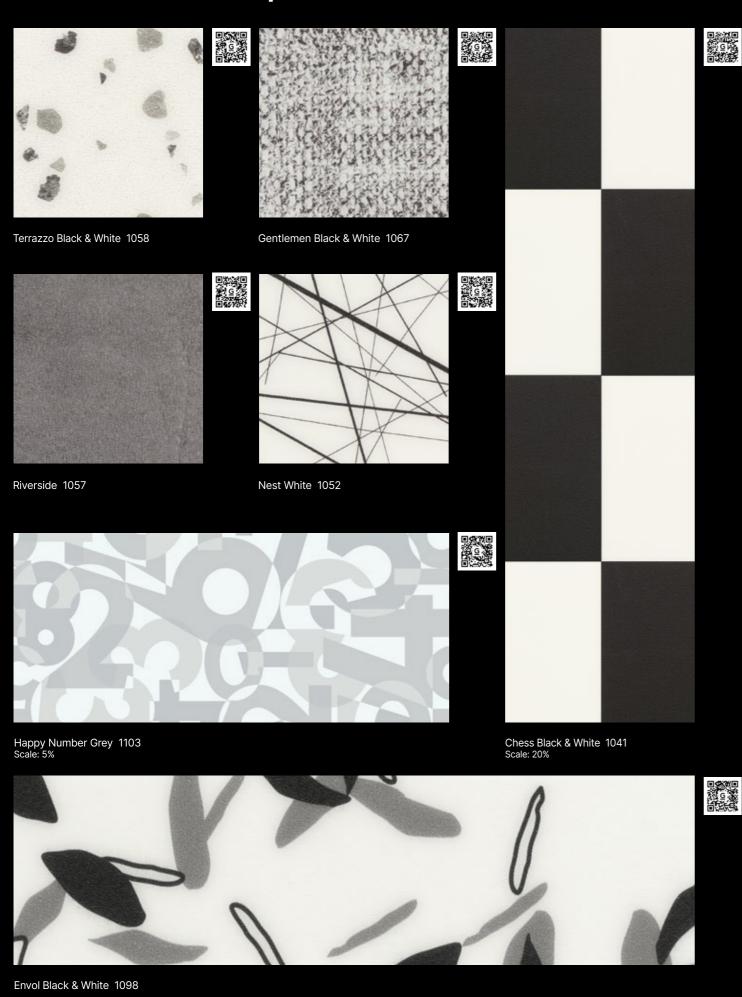

... & shades of grey








Kubes White 0755 LRV: 64,0 / NCS: 1502-Y




Nest Metal 0745




Jungle Grey 1040




Uni Matt Jungle Grey 1084



Rice Souris 0737




Nido Grey 1035



Metallic Silver 1049

\*Available in Taralay Impression hop

## Taralay Impression, graphics & biophilia...

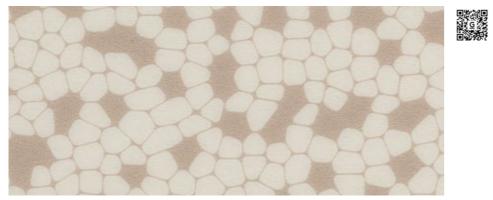



Uni Matt Dark Beige 1088


... & uni

















Rice Champa 0736


Rice Greige 0763

Uni Matt Light Green 1082

Uni Matt Dark Green 1079





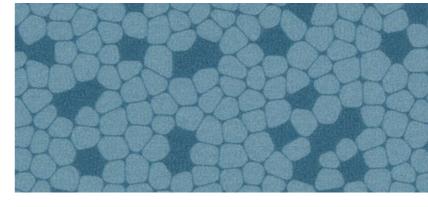




Jungle Copper 1038

Uni Matt Brick 1090


Uni Matt Copper 1089

Nido Teal 1037 Uni Matt Teal 1085



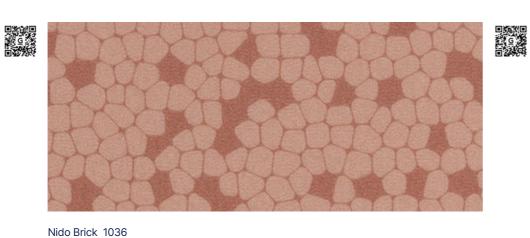



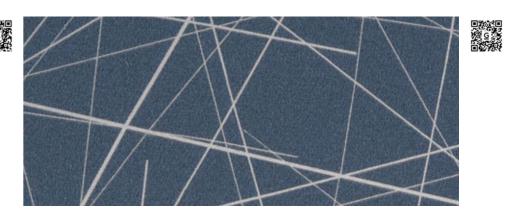

Uni Matt Navy 1083


Nest Blue 1051

\*Available in Taralay Impression hop


## "Happy" concept fun & educational





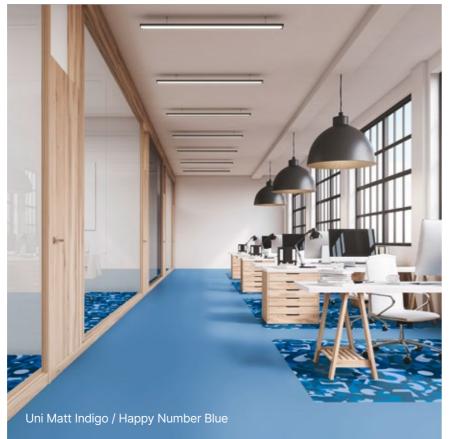







Flipkube Indigo 1042



Flipkube Purple 1075



Uni Matt Indigo 1078



Flipkube Lagoon 1044





Kubes Indigo 1050






Happy Form 1101 Scale: 5%




Uni Matt Yellow 1087




Kubes Lemon 1047


















Kubes Corail 1027






Kubes Fuschia 1030





Kubes Carmine 1031



# "Happy" concept fun & educational







Flipkube Garden 1043

Uni Matt Green 1080

Kubes Anis 1046



Happy Road 0923 Scale: 10%






















# **Taralay Impression palette**

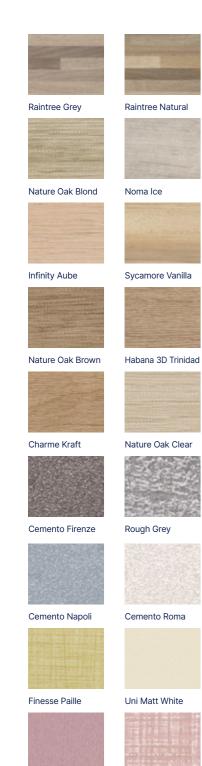









Rivau Nature





Cemento Brescia

Finesse Nature

Metallic Gold

Uni Matt Light Beige





Gentlemen Clear

Pure Wool Taupe

Wood Fusion Nature

Noma Beige

Infinity Greige

Walnut Brown

Moon Island

Sycamore Light Brown

Portobello























Envol Forest

Flipkube Indigo

Uni Matt Indigo

Happy Form






Kubes Fuschia

Uni Matt Yellow

Kubes Lemon

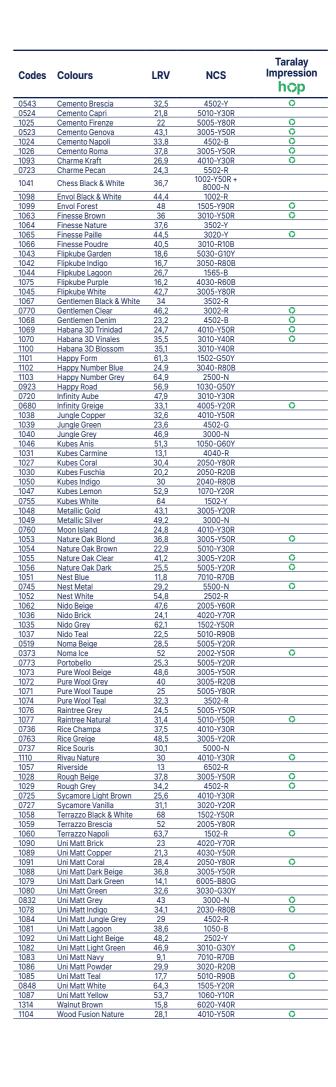














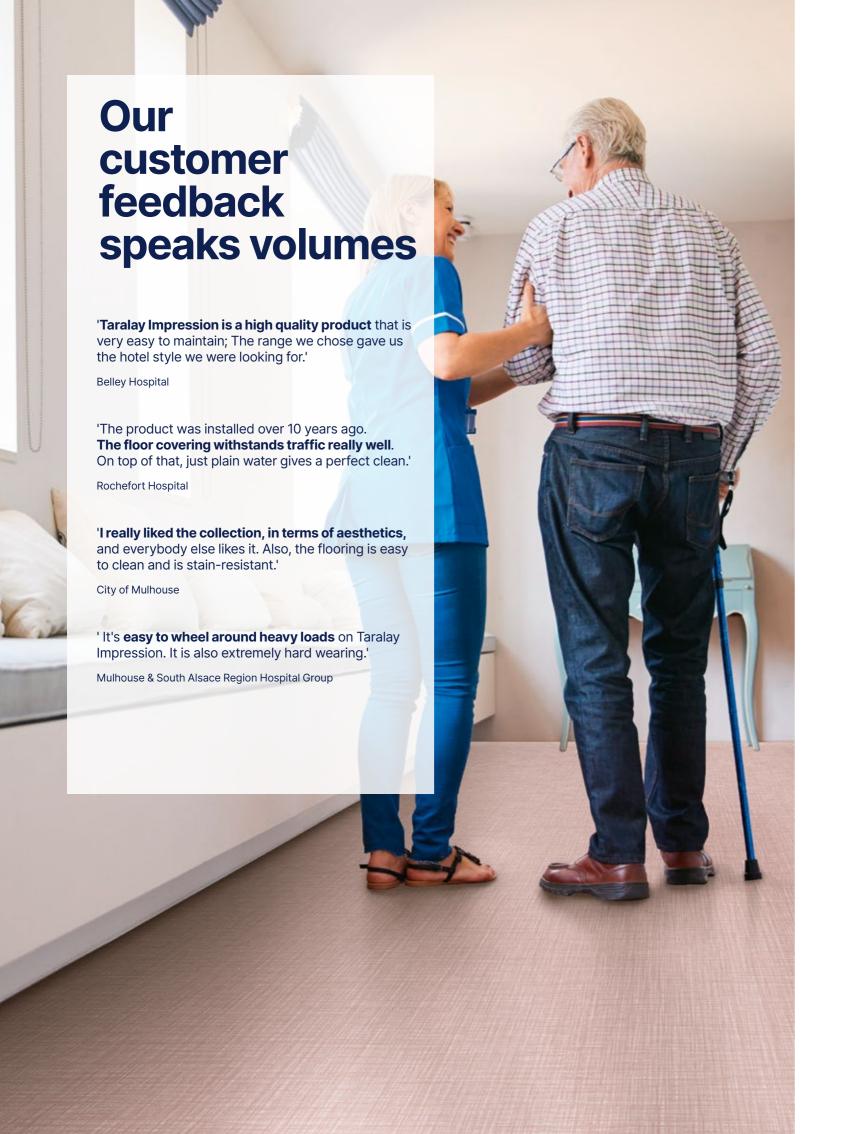

# Gerflor products help you to age well

These days, ageing well is a social challenge. In this context, supporting people who have dementia is the focus of numerous discussions.

**What is dementia?** Dementia is a syndrome that occurs in numerous neurological diseases (one of the most well-known being Alzheimer's disease), caused by progressive degeneration of certain neurons. These pathologies affect the memory, thoughts, behaviour and the ability to perform daily activities.

Gerflor is committed to helping towards ageing comfortably by developing designs and colours to suit these medical conditions.

BELOW ARE SOME KEY POINTS FOR CHOOSING A SUITABLE FLOORING:



#### **Contrasting colours**

Sections of the same area (floors, walls, accessories) must be in contrasting colours in order to improve the threedimensional perception of the different spaces and thus encourage movement. It is also important to take into account the light reflectance value (LRV\*) of the different sections.

> All the LRVs in Gerflor ranges are available on our website and our communication tools.



### 'Soft' and almost plain patterns

Heavily patterned flooring or flooring with busy patterns should be avoided, as well as the colour black, which could lead to blocking reactions due to visual barriers. We therefore recommend choosing soft patterns.

> Many designs and colours in Gerflor's ranges have semi-plain or almost plain patterns that are perfectly suitable.



#### Matt flooring

In addition to the more realistic look, matt flooring is perceived as more secure. In fact, shiny floors can look wet, making people with dementia hesitant and increase the risk of falling.

> The latest-generation surface treatments developed by Gerflor (Protecsol® 2, Evercare™ in particular) give the products a matt appearance.



### **Acoustic comfort**

You should opt for acoustic products that will reduce ambient noise and create a more calm and peaceful environment.

> Many of the Gerflor collections provide sound insulation. For example, Taralay Impression offers 19 dB (acoustic version) and 8 dB (compact version) sound insulation products.





### **Accredited products**Gerflor wanted to have its

products (notably Taralay Impression) validated and accredited by the DSDC, **Dementia Services Development Centre**.

This organisation is an independent and internationally recognised centre of knowledge and expertise dedicated to improving the lives of people with dementia.



# **Taralay Impression**

gerflor.com / follow us (in) (f)







			Taralay Impression Acoustic	Taralay Impression Compact	Taralay Impression hop Acoustic	Taralay Impression hop Compact
Description		1				
Total thickness	EN ISO 24346	mm	3.35	2.00	4.35	2.30
	ASTM F386-02	inch	0.13"	0.08"	0.17"	0.09"
Thickness of wearlayer	EN ISO 24340	mm	0.65	0.70	0.70	0.70
	ASTM F410-02	inch	0.026"	0.028"	0.028"	0.028"
Weight	EN ISO 23997	g/m²	2825	2635	3670	3125
	-	lbs/sq.ft	6.23	5.81	8.09	7.05
Width/length of sheet	EN ISO 24341	cm / lm	200 / 25	200 / 25	200 / 20	200 / 20
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 65'7"	6'6" / 65'7"
Classification					·	·
Norm/product specification	_	-	EN ISO 11638	EN ISO 10582	EN ISO 11638	EN ISO 10582
European classification	EN ISO 10874	class	34 - 42	34 - 43	34 - 42	34 - 43
Fire rating	EN 13501-1	class	B <sub>fl</sub> -s1	B <sub>fl</sub> -s1	B <sub>fl</sub> -s1	B <sub>fl</sub> -s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance wet: ramp test with oil	EN 16165 app B	classe	R10	R10	R10	R10
Performances						
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	QB 30	group	Т	Т	Т	Т
Type binder content	EN ISO 10582	type	-	1	I	I
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Dimensional stability (measured value)	-	%	0,08	0,08	0,03	0,03
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20	≤ 0.10	≤ 0.20	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.08	≈ 0.03	≈ 0.08	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	19	8	19	8
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - BO2	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance (1)	EN ISO 26987	-	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) (2)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Antiviral activity (human coronavirus) after 2h <sup>(2)</sup>	ISO 21702	-	> 99.7 % virucidal activity	> 99.7 % virucidal activity	> 99.7 % virucidal activity	> 99.7 % virucidal activity
Environment / Indoor Quality Air						
TVOC after 28 days	ISO 16000-6	microgram/m <sup>3</sup>	< 10	< 10	< 10	< 10
Certification		<u> </u>	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE marking						
(€	EN 14041	-				

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website. (2) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheets on gerflor.com

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

We care / We act Our Commitments for a Sustainable future



-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025





RECYCLED **30 %** by **2025** 



ADHESIVE **35 %** by **2025** 



**60 000 t** by **2025** 

