

DESSO

# Desert

CARPET TILES

 Tarkett



# STUNNING EFFORTLESS DESIGN

Desert lends a feeling of vast, open spaces to the indoors with its subtly layered organic design. Like the shifting sands of the desert, this textured carpet tile collection allows you to play with the space to create a serene flooring scheme.

Whether your commercial interior project is compact or spacious, the end result is stylish, contemporary flooring.





DESERT 5402







DESERT 9518, 9508, 9516, 8915, 8521, 8823





# ENRICHED COLOUR PALETTE

DESERT 7852, 6431, 7921

Offering a wider spectrum of new muted shades to bridge existing neutral and accent colours, the restyled palette of DESSO Desert presents multiple combinations for creative expression.











DESERT 4413, 9093, 5121, 1914, 2117











DESERT 9523, 2914, 2928, 5402, 2021





# ENHANCED BACKING OPTIONS

DESERT 2928, 5402

DESSO Desert comes standard with our affordable ProBase backing. However, we offer a wide selection of backing solutions specially developed to meet the needs of today's workplace.

Adding our recyclable EcoBase carpet tile backing, makes the total collection Cradle to Cradle® Silver level certified, fully recyclable and ensures that it records an impressively low circular carbon footprint of 2,32 kg CO<sub>2</sub>/m<sup>2</sup> \*.

In addition, the new SoundMaster XLite acoustic backing can be added, for improved sound absorption.

\* According to the Environmental Product Declaration (EPD) S-P-09339 – DESSO Desert EcoBase externally verified by Bureau Veritas, based on the total carbon footprint (Modules A-D) with a closed loop circular recycling scenario.






DESERT 7852, 6431, 7921






# SUSTAINABILITY CREDENTIALS

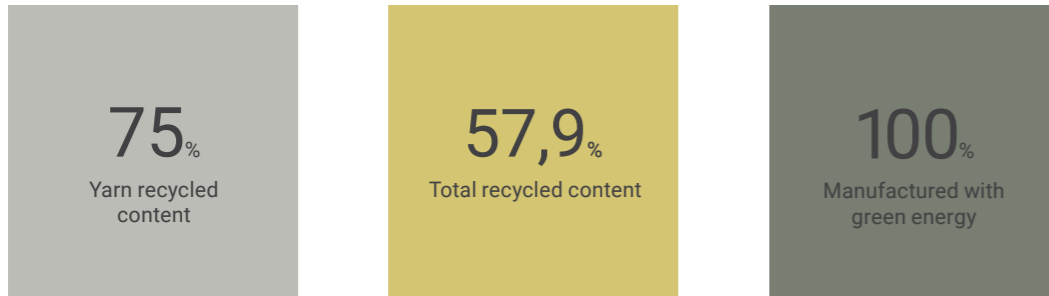

Are you looking for a more sustainable solution? Choose our Cradle to Cradle Gold® certified EcoBase carpet tile backing, which in addition makes the total collection fully recyclable and ensures that it records an impressively low circular carbon footprint.

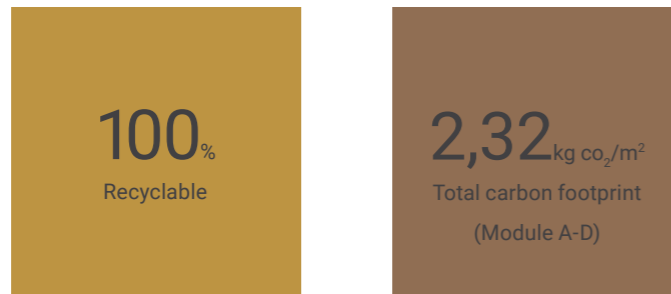






# COLOUR RANGE

CLICK HERE TO  
DOWNLOAD IN  
3D WAREHOUSE



**AC89 2928**  
712086009



**AC89 2914**  
712086008




**AC89 9516**  
712086019



**AC89 9508**  
712086003




**AC89 1321**  
712086004



**AC89 9523**  
712086020



**AC89 9093**  
712086025




**AC89 9580**  
712086021



**AC89 9518**  
712086002



**AC89 1914**  
712086005



**AC89 6118**  
712086013



**AC89 5402**  
712086012



**AC89 2117**  
712086007



**AC89 4413**  
712086010



**AC89 5121**  
712086011



**AC89 2021**  
712086006




**AC89 7852**  
712086014



**AC89 6431**  
712086023



**AC89 8823**  
712086017



**AC89 8521**  
712086016



**AC89 7173**  
712086024



**AC89 7921**  
712086015



**AC89 8915**  
712086018



**AC89 8114**  
712086022




# TECHNICAL SPECIFICATION

Preliminary specification according to EN 1307

		ProBase		SoundMaster Xlite	
Type of manufacture	ISO 2424	Tufted 1/10" Structured loop pile		Tufted 1/10" Structured loop pile	
Pile Fibre	ISO 2424	Solution dyed BCF Polyamide 6*		Solution dyed BCF Polyamide 6*	
Dimensions	EN ISO 24342	50 x 50 cm / 19,68" x 19,68" (20 tiles per box)		50 x 50 cm / 19,68" x 19,68" (20 tiles per box)	
Primary backing	ISO 2424	Polyester fleece		Polyester fleece	
Secondary backing	ISO 2424	DESSO ProBase		ProBase SoundMaster Xlite,	
Total thickness	ISO 1765	6.0 mm	0.2 inch	6.5 mm	0.3 inch
Effective pile thickness	ISO 1766	2.9 mm	0.11 inch	2.9 mm	0.11 inch
Total mass	ISO 8543	3900 g/m <sup>2</sup>	115.1 oz/yd <sup>2</sup>	3950 g/m <sup>2</sup>	116.6 oz/yd <sup>2</sup>
Total pile mass	ISO 2424	610 g/m <sup>2</sup>	18.0 oz/yd <sup>2</sup>	610 g/m <sup>2</sup>	18.0 oz/yd <sup>2</sup>
Effective pile mass	ISO 8543	370 g/m <sup>2</sup>	10.9 oz/yd <sup>2</sup>	370 g/m <sup>2</sup>	10.9 oz/yd <sup>2</sup>
Pile density	ISO 8543	0.128 g/cm <sup>3</sup>	0.0046 lb/in <sup>3</sup>	0.128 g/cm <sup>3</sup>	0.0046 lb/in <sup>3</sup>
Number of tuft	ISO 1763	1580 /dm <sup>2</sup>	132104 /yd <sup>2</sup>	1580 /dm <sup>2</sup>	132104 /yd <sup>2</sup>
Stroll test	ISO 6356	≤ 2.0 kV		≤ 2.0 kV	
Classification for use	EN 1307	33 Commercial - heavy use		33 Commercial - heavy use	
Vertical resistance	ISO 10965	≤ 1 x 10 <sup>9</sup> Ohm		≤ 1 x 10 <sup>9</sup> Ohm	
Dimensional stability	EN 986	≤ 0.2 %		≤ 0.2 %	
Impact sound reduction ΔL <sub>w</sub>	ISO 10140	24 dB		25 dB	
Noise reduction	ISO 354	0.15 α <sub>w</sub>		0.20 α <sub>w</sub>	
Flammability	EN 13501-1	B <sub>f1</sub> - s1 (loose laid tested)		B <sub>f1</sub> - s1 (loose laid tested)	

## Preliminary specification

Tarkett carpet products are to be installed in full accordance with the DESSO installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Tarkett carpet products should only be used as floorcoverings. Note: Tarkett reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our internet site: [www.desso.com](http://www.desso.com)

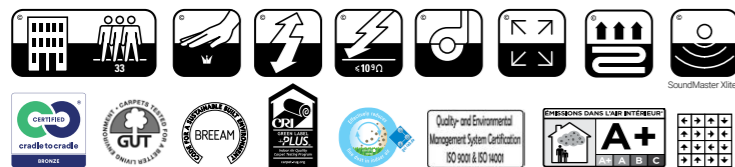


 Manufactured by:  
 Fabriqué par:  
 Geproduceerd door:  
 Hergestellt von:  
 EN 14041  
 0493-CPR-0002  
 Tarkett BV  
 PO BOX 169  
 NL - 5140AD Waalwijk

\* contains 75% recycled content.



