


Granati PC

Manufacturing process	Tufted	ISO 2424
Gauge	1/8" Cutpile	
Pile yarn composition	100% PA6	ISO 2424
Primary backing	Non Woven	
Backing	PC	
Width	130 cm, 200 cm	
Pile weight	975 gr/m ²	
Total weight	3650 gr/m ²	+/- 15% ISO 8543
Pile height	5,0 mm	ISO 1765
Total height	8,0 mm	+15% / -10% ISO 1765
Number of tufts	141730	
Overall use class	Commercial 32, Areas with medium use	EN 1307
Luxury class	LC4	EN 1307
Castor chair suitability	Yes, permanent use	EN 985
Stair suitability	Yes, permanent use	EN 1307
Colour fastness to light	≥ 5	ISO 105-B02
Colour fastness to rubbing, wet and dry	≥ 4	ISO 105-X12
Colour fastness to water	≥ 4	ISO 105-E01
Colour fastness to soiling	≥ 3,5	EN 1269
Slip resistance	> 0,3 Machine direction > 0,3 Crossdirection	EN 13893 EN 13893
Flammability	Cfl,s1	EN 13501-1
Prodis-ID (GuT)	6a22C5EA	www.pro-dis.info
TÜV PROFICERT product	Certificate number: 70 710 5617-1	

Floorsymbols



Certificates

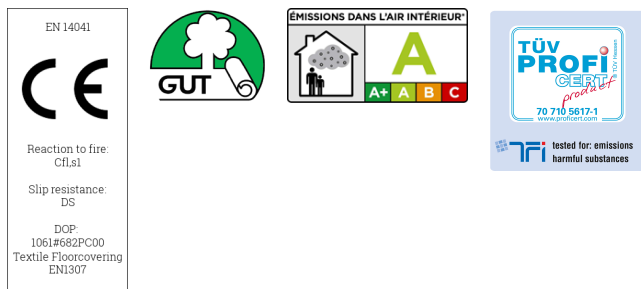

ISO 9001:2015-certified processes
 ISO 14001:2015-certified processes

2019-06-19